

PROVIX.NET
Now I CAN SEE!



Camera Systems, Lighting & Alarms

SAFETY SYSTEMS FOR COMMERCIAL VEHICLES

sales@provix.net • www.PROVIX.net • (888)434-0253



PROVIX IN YOUR REGION?

PROVIX.NET
Now I CAN SEE!

Camera & Video Systems for municipal vehicles and equipment, sewer inspection and process monitoring



Camera Systems, Lighting & Alarms

SYSTEMS FOR MUNICIPAL EQUIPMENT

PROVIX is Vision Enhancement

PROVIX enhances vision through the deployment of technologically advanced camera systems. Camera systems that have many variations available: Heated, Waterproof, 360° view, on screen distance markers, lens shutter, infrared, night vision etc.

We supply a variety of safety and video systems such as :

- Rear-View Camera systems
- Self-adjusting Reversing alarms
- Roadwatch- Road temperature Monitoring system
- Warning Lights/ Light bars
- Remote Controlled Spot Lights
- Portable/ battery operated lights
- Confined Space Communication System
- Sewer Inspection Camera System
- Incident Recording Systems
- Fleet management/ GPS Tracking
- Dash Cams
- Camera Wash and Air Cleaning Systems
- Traffic Advisors
- SWS Lights
- Go Lights
- K&H lights
- Flood/ Spot Work Lights
- LED Strobes
- Proximity Detection/ Radar Sensor Systems





ProVix is Vision Enhancement

TYPES OF CAMERAS

- HEATED
- SHUTTER
- THERMAL IMAGING
- PROCESS MONITORING
- SEWER INSPECTION
- 360° PANORAMIC
- PAN / TILT / ZOOM CAMERAS
- CAMERAS WITH INTEGRATED IR'S AND WHITE LIGHT
- TRIGGERED EVENT MONITORING

WASTE MANAGEMENT CAMERA SYSTEM WITH RECORDING

**360°
FIELD OF VIEW**

PROVIX Waste Management System with recording includes automatic reverse activated or "switch on when required" heated rear view shutter cameras, and forward facing bullet style cameras with 360 degree field of view. Operators can see everything behind and in front of their vehicle, regardless of seating position. The 7" LCD TFT monitors include DVRs that record all four cameras all the time, and with 32 GB SD cards, an entire shift can be recorded. Cameras are waterproof and the vehicle mounted DVR monitors offer auto brightness control as well as intuitive menus and high resolution viewing. Monitors will display cameras based on the direction of travel, or all four cameras simultaneously.



WASTE TRUCK HEATED CAMERA SYSTEM

PROVIX.NET
Now I CAN SEE!

SHV-70M3AV-HT20M



Camera Specifications:

Image Device: SHARP

TV System: PAL / NTSC

Effective Pixels: 512 x 582 Pixels / 512 x 492 Pixels

Sensing Area: 4.9mm x 3.7mm

Scanning System: 2:1 Interlace

Sync. System: Internal

Resolution: 420TV lines

Horizontal Sync. Frequency: 15.625KHz / 15.734KHz

Vertical Sync. Frequency: 50Hz / 60Hz

Minimum Illumination: 0 Lux/F1.2 with IR

Microphone: Optional

Video Output: 1.0vp-p, 75Ohm

Gamma Consumption: 0.45

AGC: Auto

S/N Ratio: Better than 48dB

White Balance: Auto

Electronic Shutter: 1/60(NTSC) / 1/50(PAL) ~
1/10,000 Seconds

BLC: Auto

Current Consumption: Max. 300mA

Power Supply: DC12V

Operating Temperature: -20°C~70°C , RH95% MAX

Storage Temperature: -40°C~80°C , RH95% MAX

Lens: f=3.6mm / 2.8mm F = 2.0

Lens Angle: 92/120

Monitor Specifications:

LCD size: 7.0 inch (178 mm)

Brightness: 400cd/M²

Contrast Ratio: 500:1

Dimensions: 185 x 124
x 48 mm

Dimensions: 7 x 5 x 1 inch

Viewing Angle: Up/45°, Dwn/65°,
R/65°, L/65°

Power Consumption: 12W
(12V/1A)

Temperature Range: -20° C to
70° C

24/12 Volt Power Regulator Built-
In

Supports 3 Camera Inputs



CALL TOLL FREE: 1-888-434-0253 — CONTACT: SALES@PROVIX.NET — VISIT: WWW.PROVIX.NET

WASTE TRUCK HEATED SHUTTER CAMERA

PROVIX.NET
Now I CAN SEE!

Part#: SHV-SP70C3-SH

REVERSING SAFELY WITH PROVIX CAMERA SYSTEMS

Monitor Specifications:

LCD size: 7.0 inch (178 mm)

Brightness: 400cd/M²

Contrast Ratio: 500:1

Dimensions: 185 x 124 x 48 mm

Dimensions: 7 x 5 x 1 inch

Viewing Angle: Up/45°, Dwn/65°,
R/65°, L/65°

Power Consumption: 12W (12V/1A)

Temperature Range: -20° C to 70° C

-24/12 Volt Power Regulator Built-In

- Supports 3 Camera Inputs



SHUTTER (LENS COVER) CAMERA SPECIFICATIONS:

VIEW ANGLE: 100° HORIZONTAL (120° DIAGONAL)

IMAGE SENSOR: OV7940 1/3" COLOR

RESOLUTION: 420 LINES

SHUTTER (LENS COVER): 1/80S~12USEC

TEMPERATURE RANGE: -20° C TO 70° C

ILLUMINATION: 0.1 LUX F:2.0

POWER (LED ON): 12 VDC, 450 MA

BUILT-IN MICROPHONE

WATER-TIGHT CABLES 20 METER (66 FT)

12 "IR" INFRARED LAMPS



SHUTTER KEEPS LENS CLEAN WHEN NOT IN USE



CALL TOLL FREE: 1-866-542-1343 — CONTACT: SALES@PROVIX.NET — VISIT: WWW.PROVIX.NET

PROVIX.NET
Now I CAN SEE!


Dual Camera System with Recording



Blindspot Camera



Shutter Camera

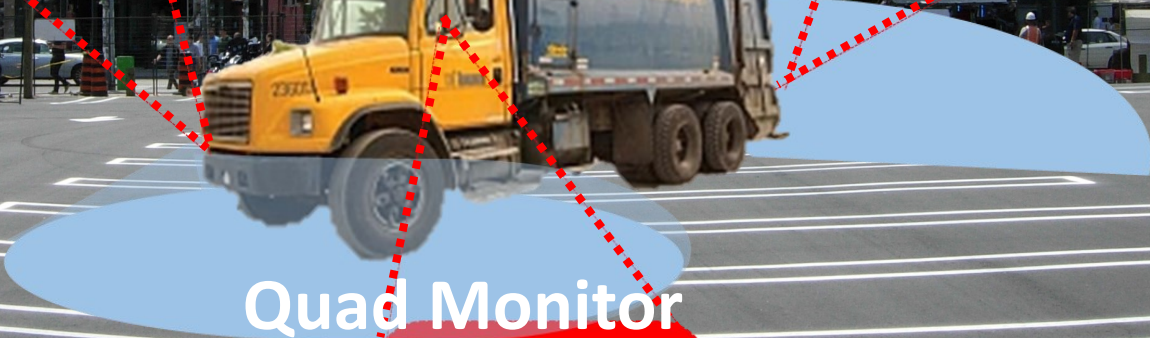

Quad Monitor

PROVIX.NET
Now I CAN SEE!

Part # VEC-70MQSH180-32GB

This system is purpose built for waste haulers. The camera system includes an automatic reverse activated or "switch on when required" heated rear shutter camera, and a forward facing bullet style camera with 180 degree field of view. Operators can see everything behind and in front of their vehicle, regardless of seating position. The 7" LCD TFT monitor includes a DVR that records both cameras all the time, and with a 32 GB SD card, an entire shift can be recorded. Cameras are waterproof and the vehicle mounted DVR monitor offers auto brightness control as well as intuitive menus and high resolution viewing. Monitor will display camera based on the direction of travel, or both cameras sim-





CALL TOLL FREE: 1-888-434-0253 — CONTACT: SALES@PROVIX.NET — VISIT:

WWW.PROVIX.NET

Aerial View Camera System

4 Cameras, 1 Image, 0 Blind Spots

Operator has birds eye view of equipment and surroundings

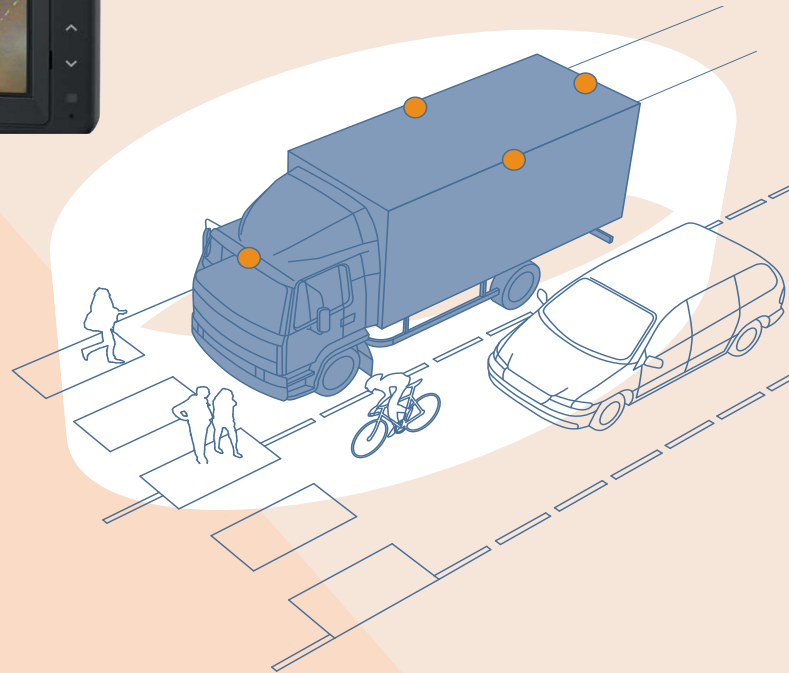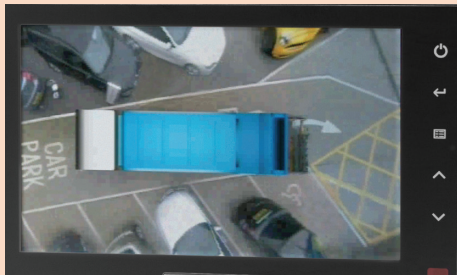

Features & Benefits

- Applicable for ALL mobile equipment
- Four 180 Camera Lenses cover the entire perimeter and surroundings, including all blind spots
- Real-time video output
- Birds Eye View of your equipment and surroundings
- Comprehensive "all-round" view of vehicle in a single image

360° Aerial View provides the operator with full situational awareness of anyone or anything that is behind, in front, or on either side of the vehicle

Four cameras provide images from each side of the vehicle- those images are then then stitched together much like taking a panoramic picture.

The operator of the vehicle has a Split Screen view that displays both the 360° Aerial view as well as the video display from camera facing in the direction of travel.

No operator intervention is required- Camera views are triggered automatically based on the direction of travel.

360° Camera lens totally eliminates all blind spots

Split Screen Viewing eliminates Screen clutter and offers rapid identification of obstacles or people.

360° camera system is suitable for any type of equipment where the operator has reduced or restricted line of sight or "blindspots"

Provix GPS/Camera System

Features

- HEAVY DUTY = COMMERCIAL GPS Monitor + EXTREME IP69 CCD Cameras
- 7" Touchscreen GPS Navigation + Backup Camera System
- 3 Camera Inputs– Back/Right Side/Left Side
- IR Night Vision Heated Camera IP69 Waterproof & 20G Vibration Resistant
- FULL SCREEN VIEW Monitor w/Auto Trigger Activation (reverse, turn signals, etc.)
- High Sensitive camera microphone plays through monitor speaker (Audio)
- Free Power Input DC11V ~ 24Volts to protect from damaging power fluctuation



**1 YEAR
WARRANTY**

Switch from GPS to Rearview/
Side view Camera instantly

- IP 69 Camera
- 3 Camera Inputs
- Rugged Vibration Resistant (10g)
- High Sharpness & Brightness
- 1 Year Warranty



All-in-One: 3G/WiFi Enabled Vehicle Accident Camera with Live Tracking & Real-Time Image Transfer

KP1S The SmartWitness KP1S is the world's most advanced incident camera with 720p HD video, 3G or WiFi connectivity, live GPS position & driver behavior reports to support post-incident analysis.

Developed to provide evidence of events leading up to and during a road traffic incident, the KP1S provides immediate notifications & photo/video evidence delivered to your desktop in seconds!




- ⊙ Real-time HD image of driver's view -170° angle
- ⊙ Optional 2nd camera for side, rear, driver or cargo view
- ⊙ Video sent in real-time via email or to your telematics system
- ⊙ Dual SD cards for longer recording or redundancy
- ⊙ Instant notification via 3G
- ⊙ Live impact alerting including: location/speed/event footage
- ⊙ Tamper-resistant design, key required to access SD card data

SD Card



KP1S makes constant recordings of video footage and drive data on a loop as the journey continues. This data can be accessed manually at any time by retrieving the KP1S' SD card(s) and inserting into your PC. The included analysis software allows you to view recorded video and drive data evidence of an event. KP1S does not require 3G or WiFi to operate as a stand-alone system.

SmartMail



SmartMail was developed with the small/medium fleet operator in mind. It delivers driver safety and protection information to you within moments of an incident taking place. Using KP1 with a cellular modem, safety-critical road events will automatically transmit an email notification with the video clip and event information enclosed. An online portal is provided to help manage all vehicle events.

SmartAPI



SmartWitness enables TSPs (Telematics Services Providers) to pull video, GPS data, audio, & G-Sensor data directly from KP1S and onto your existing Telematics or GPS tracking software. Instead of hosting your own solution with the local server model, your TSP will host it on your behalf and add it to your monthly bill, with the convenience of an integrated system. One invoice, one UI.



Provix... NOW I CAN SEE

TYPES OF LED AND HID LIGHTING

- REMOTE CONTROLLED SEARCHLIGHT
- SPOT
- PORTABLE / BATTERY OPERATED
- GLARE BUSTERS—ANTI GLARE
- FLOOD
- GRILL LIGHTS
- TAIL LIGHTS
- LIGHT BARS
- STROBE LIGHTS
- WARNING LIGHTS
- ROTATING BEACONS
- WARNING LIGHT STICKS / ARROW BOARD

40" LED Warning Light Stick - Multiple Pattern

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-2940A	Amber	32 x 1W	Amber	8 Patterns	12V - 30V	4.03 @ 12V	Box



- Lamp Dimension : 40"L x 2"H x 2-1/2" D [3" D mounted]
- Aluminium Light Bar with Polycarbonate Lens
- Mounts with "L" or "T" Brackets (included)
- Comes with Control Box for Flash Selection
- 12.8 ft Wire from the Light Bar & 10" Wire from the Control box
- IP 65
- Full Unit Quad Flash & Left/Right Alternating Single Flash

LED Warning Light Set with Small Arrows - Multiple Pattern

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-2980A	Amber	48 x 1W	Amber	8 Patterns	12V - 30V	4.62 @ 12V	Box



- Lamp Dimension : 45-1/4"L x 10"H x 2-1/2" D [3" D mounted]
- Aluminium Light Bar with Polycarbonate Lens
- Mount with "L" or "T" Brackets (included)
- Comes with Control Box for Flash Selection
- 12.8 ft Wire from the Light Bar & 10" Wire from the Control box
- Foldable Arrows for Easy Storage
- IP 65
- Full Unit Quad Flash & Left/Right Alternating Single Flash

LED Warning Light Set with Large Arrows - Multiple Pattern

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-2990A	Amber	64 x 1W	Amber	8 Patterns	12V - 30V	4.95 @ 12V	Box



- Lamp Dimension : 45-1/4"L x 17-1/2"H x 2-1/2" D [3" D mounted]
- Aluminium Light Bar with Polycarbonate Lens
- Mount with "L" or "T" Brackets (included)
- Comes with Control Box for Flash Selection
- 12.8 ft Wire from the Light Bar & 10" Wire from the Control box
- Foldable Arrows for Easy Storage
- IP 65
- Full Unit Quad Flash & Left/Right Alternating Single Flash

Part No.	Replacement Accessories for PRXE-2940A, PRXE-2980A & PRXE-2990A	Pkg
PRXE-F291	Replacement Control Box	Bulk
PRXE-F292	Replacement "L" Bracket (sold in pairs)	Bag
PRXE-F293	Replacement "T" Bracket (sold in pairs)	Bag
PRXE-F297	13 ft Extension Wire w/ Connectors	Bulk
PRXE-F298	33 ft Extension Wire w/ Connectors	Bulk

9.75" Compact LED - Multiple Pattern


Permanent Mount Models

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-2110AC	Amber	30 x 1W	Clear	23 Patterns	12V - 24V	3.8 @ 12V	Box
	Mounting Type		2 Mounting Brackets with Lead Wires				
PRXE-2110ACB	Amber	30 x 1W	Clear	23 Patterns	12V - 24V	3.8 @ 12V	Box
	Mounting Type		Single Bolt Bracket with Lead Wires				


- Lamp Dimension : 9.75" L x 6.77" W x 1.45" H [2" H mounted]
- Polycarbonate Lens & Base
- EMC IPX5
- **SAE J845 Class 1** on all lamp single, quint & ultra flashes
- **SAE J845 Class 2** on all lamp double & quad flashes & 360° rotating flash



PRXE-2110AC



PRXE-2110AC




PRXE-2110ACB

Part No.	Accessories for E-2110AC & E-2110ACB	Pkg
PRXF-S955	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXST105 On-Off-Momentary On Toggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXE-F212	Replacement Brackets (sold in pairs) for PRXE-2110AC	Bulk
PRXE-F211	Replacement Bracket for PRXE-2110ACB	Bulk

Magnetic Mount Model

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-2110ACM	Amber	30 x 1W	Clear	23 Patterns	12V - 24V	3.8 @ 12V	Box

- Lamp Dimension : 9.75" L x 6.77" W x 1.45" H [1-13/16" H mounted]
- Polycarbonate Lens & Base
- 4-Magnet Mount, Fused Cigarette Power Adaptor with On/Off Switch, Flash Selection Switch & 9.8 ft of Wire
- EMC IPX5
- **SAE J845 Class 1** on all lamp single, quint & ultra flashes
- **SAE J845 Class 2** on all lamp double & quad flashes & 360° rotating flash



PRXE-2110ACM



PRXE-2110ACM

15" LED Quad Flash (alternating left & right)

Low profile, slim line, aluminium light bar with high output LED diodes.

Magnetic Mount Model

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-2150AM	Amber/Amber	32 x 1W	Amber	Quad Alternating Left & Right	12V - 30V	0.74 @ 12V	Box

- Lamp Dimension : 15" L x 3-11/16" W x 1-7/16" H [2-3/16" H mounted]
- Aluminium Light Bar with Polycarbonate Lens
- 2 Magnets with Suction Cups
- Fused Cigarette Power Adaptor with On/Off Switch & 12.5 ft of Wire
- EMC IP65
- **SAE J595 Class 1** (Front & Rear Directional)



PRXE-2150AM

14" Compact LED - Multiple Pattern

Low profile but powerful 360° LED Warning Light Bars. Very bright and complies with SAE Class 1 Standards.

Permanent Mount Model

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-2140AC	Amber	24 x 1W	Clear	23 Patterns	12V - 24V	3.8 @ 12V	Box



PRXE-2140AC

- Lamp Dimension : 14" L x 8" W x 2" H
- Polycarbonate Lens & Base
- 1-Bolt Mounting Brackets with Lead Wires
- EMC IPX4K
- **SAE J845 Class 1** on flashes

Part No.	Accessories for E-2140A	Pkg
PRXF-S955	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXST105 On-Off-Momentary On Toggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag

Magnetic Mount Model

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-2140ACM	Amber	24 x 1W	Clear	23 Patterns	12V - 24V	3.8 @ 12V	Box



PRXE-2140ACM

- Lamp Dimension : 14" L x 8" W x 2" H
- Polycarbonate Lens & Base
- 2-Magnet Mount, Fused Cigarette Power Adaptor with On/Off Switch, Flash Selection Switch & 9.8 ft of Wire
- EMC IPX4K
- **SAE J845 Class 1** on 3 flashes

16.5" LED Multiple Pattern

Permanent Mount Mode

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-2160A	Amber	18 x 1W	Amber	19 Patterns	12V	3.07 @ 12V	Box



PRXE-2160A

- Lamp Dimension : 16-5/8" L x 10-7/8" W x 3" H [3-3/4" H mounted]
- Polycarbonate Lens & Base
- 2 Mounting Brackets with Lead Wires
- EMC IPX5
- **SAE J845 Class 1** on all lamp single & quint flashes
- **SAE J845 Class 2** on all lamp double, quad & ultra flashes

Part No.	Accessories for E-2160A	Pkg
PRXF-S975	Fuse/Switch Kit consisting of: ST100 On/Off Toggle Switch, ST105 On-Off-Momentary On Toggle Switch, ATM075 7.5 Amps Mini Fuse & ATMF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXE-F216	Replacement Brackets (sold in pairs) for E-2160A	Bulk

16.5" LED Multiple Pattern

Magnetic Mount Model

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-2160AM	Amber	18 x 1W	Amber	19 Patterns	12V	3.07 @ 12V	Box

- Lamp Dimension : 16-5/8" L x 6-3/8" W x 3" H [3-1/2" H mounted]
- Polycarbonate Lens & Base
- 4-Magnet Mount, Fused Cigarette Power Adaptor with On/Off Switch, Flash Selection Switch & 11.5 ft of Wire
- EMC IPX5
- **SAE J845 Class 1** on all lamp single & quint flashes
- **SAE J845 Class 2** on all lamp double, quad & ultra flashes



PRXE-2160AM

16.5" LED Quad Flash (alternating left & right)

Permanent Mount Models

Part No.	Diodes Colour	Diodes	Dome/Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-280AA	Amber/Amber	32 x 1W	Amber	Quad Alternating Left & Right	12V - 30V	1.13 @ 12V	Box
PRXE-280AC	Amber/Amber	32 x 1W	Clear	Quad Alternating Left & Right	12V - 30V	1.13 @ 12V	Box
PRXE-280AW	Amber/White	32 x 1W	Clear	Quad Alternating Left & Right	12V - 30V	1.13 @ 12V	Box

- Lamp Dimension : 16-1/2" L x 8-1/16" W x 4-3/16" H
- Sturdy ABS Base with Polycarbonate Dome & Lens
- Mounting centres 12-5/8" by 6"
- EMC IP65
- PRXE-280AA and PRXE-280AC - **SAE J595 Class 1** (Front & Rear Directional)



PRXE-280AA



PRXE-280AC /E-280AW

Part No.	Accessories for E-280AA, E-280AC & E-280AW	Pkg
PRXF-S950	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag

Magnetic Mount Models

Part No.	Diodes Colour	Diodes	Dome/Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-280AAM	Amber/Amber	32 x 1W	Amber	Quad Alternating Left & Right	12V - 30V	1.13 @ 12V	Box
PRXE-280ACM	Amber/Amber	32 x 1W	Clear	Quad Alternating Left & Right	12V - 30V	1.13 @ 12V	Box
PRXE-280AWM	Amber/White	32 x 1W	Clear	Quad Alternating Left & Right	12V - 30V	1.13 @ 12V	Box

- Lamp Dimension : 16-1/2" L x 8-1/16" W x 4-3/16" H [4-1/2" H mounted]
- Sturdy ABS Base with Polycarbonate Dome & Lens
- 2 Magnets with Suction Cups
- Fused Cigarette Power Adaptor with On/Off Switch & 11 ft of Wire
- EMC IP65
- PRXE-280AAM and PRXE-280ACM - **SAE J595 Class 1** (Front & Rear Directional)



PRXE-280AAM



PRXE-280ACM /PRXE-280AWM

Low profile, slim line, aluminium light bar with high output LED diodes. Available in 23" and 45" lengths.

23" LED Multiple Pattern

Permanent Mount Model

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-2230A	Amber/Amber	40 x 1W	Amber	8 Patterns	12V - 30V	3.49 @ 12V	Box



PRXE-2230A

- Lamp Dimension : 23" L x 3-11/16" W x 1-7/16" H [3-7/8" H mounted w/ brackets]
- Aluminium Light Bar with Polycarbonate Lens
- Complete with adjustable mounting brackets and control box for flash pattern selection
- 12 ft Wire from the Light Bar & 6" Wire from the Control box
- ECM IP65
- **SAE J595** (Front & Rear Directional) - **Class 1** on 1 flash & Class 2 on other flashes

PRXE-2232AM



PRXE-F200-8



PRXE-F255

Part No.	Accessories for E-2230A	Pkg
PRXE-F255	Low Profile Aluminium Brackets (sold in pairs) to reach mounted height of 2" only Bracket Dimension : 5-3/16" L x 3/4" W x 9/16" H Mounting Holes : Two 7/32" holes at 4-3/4" centres	Retail Bag
PRXE-F065-8	6.5 ft Extension Wires w/ Connectors (8-Pin) for PRXE-2230A	Bulk
PRXE-F260-8	26 ft Extension Wires w/ Connectors (8-Pin) for PRXE-2230A	Bulk
PRXE-F200-8	Replacement Control Box (8-Pin)	Bulk
PRXE-F250	Replacement Mounting Brackets (sold in pairs)	Bulk

Magnetic Mount Models

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-2232AM	Amber/Amber	40 x	Amber	12 Patterns	12V - 30V	0.92 @ 12V	Box
PRXE-2232ACM	Amber/Amber	40 x	Clear	12 patterns	12V - 30V	0.92 @ 12V	Box
PRXE-2232AWM	Amber/White	40 x	Clear	12 Patterns	12V - 30V	1.61 @ 12V	Box



PRXE-2232AM



PRXE-2232ACM / PRXE-2232AWM

- Lamp Dimension : 23" L x 3-11/16" W x 1-7/16" H [2-3/16" H mounted]
- Aluminium Light Bar with Polycarbonate Lens
- 2 Magnets with Suction Cups
- Fused Cigarette Power Adaptor with Switch for Flash Pattern Selection & 12.5 ft of Wire
- EMC IP65

45" LED Multiple Pattern

Permanent Mount Model

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-2450A	Amber/Amber	72 x 1W	Amber	8 Patterns	12V - 30V	5.55 @ 12V	Box



PRXE-2450A

- Lamp Dimension : 45" L x 3-11/16" W x 1-7/16" H [3-7/8" H mounted w/ brackets]
- Aluminium Light Bar with Polycarbonate Lens
- Complete with adjustable mounting brackets and control box for flash pattern selection
- 12 ft Wire from the Light Bar & 6" Wire from the Control box
- EMC IP65
- **SAE J595** (Front & Rear Directional) - **Class 1** on 1 flash & Class 2 on other flashes



PRXE-F200-8



PRXE-F700-2 Mounted



PRXE-F255

Part No.	Accessories for E-2450A	Pkg
PRXE-F700-2	Plated Steel Extension Plate (sold in pairs) to extend length of light bar to fit larger pick up trucks, such as Ford 250 Plate Dimension : 16" L x 2" W	Bulk
PRXE-F255	Low Profile Aluminium Brackets (sold in pairs) to reach mounted height of 2" only Bracket Dimension : 5-3/16" L x 3/4" W x 9/16" H Mounting Holes : Two 7/32" holes at 4-3/4" centres	Retail Bag
PRXE-F065-8	6.5 ft Extension Wires w/ Connectors (8-Pin) for PRXE-2450A	Bulk
PRXE-F260-8	26 ft Extension Wires w/ Connectors (8-Pin) for PRXE-2450A	Bulk
PRXE-F200-8	Replacement Control Box (8-Pin)	Bulk
PRXE-F250	Replacement Mounting Brackets (sold in pairs)	Bulk

Compact Low Profile - Multiple Pattern

Compact but powerful directional LED Warning Lights. Low profile - about 3/4" in height. Very bright and complies with SAE Class 1 standards. Various mounting brackets available for PRXE-915 series - easily mounts on every application : surface mount, grill mount, dash mount or head liner mount.

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-915AA	Amber/Amber	6	Clear	19 Patterns	12V - 24V	0.50 @ 12V	Retail Bag
PRXE-915AW	Amber/White	6	Clear	19 Patterns	12V - 24V	0.70 @ 12V	Retail Bag
PRXE-915WW	White/White	6	Clear	19 Patterns	12V - 24V	0.80 @ 12V	Retail Bag
PRXE-915BB	Blue/Blue	6	Clear	19 Patterns	12V - 24V	0.57 @ 12V	Retail Bag
PRXE-915BR	Blue/Red	6	Clear	19 Patterns	12V - 24V	0.55 @ 12V	Retail Bag
PRXE-915GG	Green/Green	6	Clear	19 Patterns	12V - 24V	0.46 @ 12V	Retail Bag
PRXE-915RR	Red/Red	6	Clear	19 Patterns	12V - 24V	0.61 @ 12V	Retail Bag



PRXE-915 Side



PRXE-915

- Lamp Dimension : 5" L x 1" W x 11/16" H
- Black Powder Coated Aluminium Base & Polycarbonate Lens
- Surface mount - 2 holes @ 4-3/4" centres
- Lights can be synchronized using yellow wire
- EMC IPX7
- PRXE-915AA, PRXE-915WW, PRXE-915BB and PRXE-915RR : **SAE J595 Class 1** on 5 flashes

Part No.	Accessories for E-915 series	Pkg
PPRXF-S935	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXST108 Momentary On-Off Toggle Switch PRXATS03 3 Amps Standard Fuse & PRXATSF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXE-F951	"L" Bracket for mounting single PRXE-915	Bulk
PRXE-F952	"L" Bracket for mounting double PRXE-915	Bulk
PRXE-F953	"T" Bracket for mounting PRXE-915	Bulk
PRXE-F954	Adjustable Swivel Bracket	Bulk



PRXE-F951



PRXE-F952



PRXE-F953



PRXE-F954

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-913A	Amber	3	Clear	12 Patterns	12V - 24V	0.29 @ 12V	Retail Bag
PRXE-913W	White	3	Clear	12 Patterns	12V - 24V	0.42 @ 12V	Retail Bag



PRXE-913

- Lamp Dimension : 3-5/16" L x 1-1/8" W x 11/16" H
- Black Powder Coated Aluminium Base & Polycarbonate Lens
- Surface mount - 2 holes @ 3-1/16" centres
- Lights can be synchronized using yellow wire
- EMC IPX7
- **SAE J595 Class 2** on 7 flashes

Part No.	Accessories for E-913 series	Pkg
PPRXF-S935	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXST108 Momentary On-Off Toggle Switch PRXATS03 3 Amps Standard Fuse, PRXATSF14C In-Line Fuse Holder w/ Cover	Retail Bag

LED Quad Flash (Strobe)



PRXE-950A



PRXE-950CA



PRXE-950G



PRXE-950CG



PRXE-950B



PRXE-950CW



PRXE-950R

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-950A	Amber	4	Amber	Quad	9V - 36V	0.40 @ 12V	Retail Bag
PRXE-950CA	Amber	4	Clear	Quad	9V - 36V	0.40 @ 12V	Retail Bag

- Lamp Dimension : 4-3/4" L x 1-7/8" W x 1-5/8" H
- Aluminium Die Cast Base & Polycarbonate Lens
- Surface mount - 2 holes @ 4-1/2" centres
- EMC IP67
- **SAE J595 Class 2**

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-950G	Green	4	Green	Quad	9V - 36V	0.40 @ 12V	Retail Bag
PRXE-950CG	Green	4	Clear	Quad	9V - 36V	0.40 @ 12V	Retail Bag

- Lamp Dimension : 4-3/4" L x 1-7/8" W x 1-5/8" H
- Aluminium Die Cast Base & Polycarbonate Lens
- Surface mount - 2 holes @ 4-1/2" centres
- EMC IP67

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-950B	Blue	4	Blue	Quad	9V - 36V	0.30 @ 12V	Retail Bag
PRXE-950CW	White	4	Clear	Quad	9V - 36V	0.40 @ 12V	Retail Bag
PRXE-950R	Red	4	Red	Quad	9V - 36V	0.30 @ 12V	Retail Bag

- Lamp Dimension : 4-3/4" L x 1-7/8" W x 1-5/8" H
- Aluminium Die Cast Base & Polycarbonate Lens
- Surface mount - 2 holes @ 4-1/2" centres
- EMC IP67
- **SAE J595 Class 2**

Part No.	Accessories for E-950 Series	Pkg
PRXF-S950	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag

LED White Steady Utility Light



PRXE-955C

Part No.	Diodes Colour	Diodes	Lens Colour	Pattern	Voltage	Amps	Pkg
PRXE-955C	White	4	Clear	Steady	12V	0.50	Retail Bag

- Lamp Dimension : 4-3/4" L x 1-7/8" W x 1-5/8" H
- Aluminium Die Cast Base & Polycarbonate Lens
- Surface mount - 2 holes @ 4-1/2" centres
- IP67

4" Round LED Quad Flash (Strobe)

PRXE-940 has the same dimension as a 4" tail lamp. Use regular open or closed back grommets and double contact pigtails. Convenient and easy to install. Lamp kits with grommet, pigtail & mounting bracket available for instant installation. Also available in rubber housing just like a work lamp for permanent mount or magnetic mount.

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-940A	Amber	24	Amber	Quad	9V - 36V	0.38 @ 12V	Retail Bag
PRXE-940CA	Amber	24	Clear	Quad	9V - 36V	0.38 @ 12V	Retail Bag
PRXE-940B	Blue	24	Blue	Quad	9V - 36V	0.38 @ 12V	Retail Bag
PRXE-940R	Red	24	Red	Quad	9V - 36V	0.38 @ 12V	Retail Bag

- Lamp Dimension : 4-1/4" Dia x 1-3/4" H
- Polycarbonate Lens & Body
- EMC IP67
- SAE J595 Class 2



Part No.	Kits for Instant Installation:	Pkg
PRXE-940A-K	with Open Back Grommet & Double Contact Pigtail	Retail Bag
PRXE-940CA-K	with Open Back Grommet & Double Contact Pigtail	Retail Bag
PRXE-940B-K	with Open Back Grommet & Double Contact Pigtail	Retail Bag
PRXE-940R-K	with Open Back Grommet & Double Contact Pigtail	Retail Bag
PRXE-940A-KM	with Black Steel Mounting Bracket, Open Back Grommet & Double Contact Pigtail	Retail Bag
PRXE-940CA-KM	with Black Steel Mounting Bracket, Open Back Grommet & Double Contact Pigtail	Retail Bag
PRXE-940B-KM	with Black Steel Mounting Bracket, Open Back Grommet & Double Contact Pigtail	Retail Bag
PRXE-940R-KM	with Black Steel Mounting Bracket, Open Back Grommet & Double Contact Pigtail	Retail Bag



Part No.	Rubber Lamp Assembly	Pkg
PRXE-940A	in Rubber Housing	Retail Bag
PRXE-940CA	in Rubber Housing	Retail Bag
PRXE-940B	in Rubber Housing	Retail Bag
PRXE-940R	in Rubber Housing	Retail Bag



Part No.	Magnetic Mount Rubber Lamp Assembly	Pkg
PRXE-940A	in Rubber Housing with Magnetic Base & Fused Cigarette Power Adaptor	Retail Bag
PRXE-940CA	in Rubber Housing with Magnetic Base & Fused Cigarette Power Adaptor	Retail Bag
PRXE-940B	in Rubber Housing with Magnetic Base & Fused Cigarette Power Adaptor	Retail Bag
PRXE-940R	in Rubber Housing with Magnetic Base & Fused Cigarette Power Adaptor	Retail Bag



Part No.	Accessories for E-940 series	Pkg
PRXF-S950	Fuse/Switch Kit consisting of: PRXST100 On/Off Taggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag

PRXE-920 & PRXE-921 are the same dimensions as an oval tail lamp. Use regular open or closed back grommets and double contact pigtails. Convenient and easy to install. Lamp kits with grommet, pigtail & mounting bracket available for instant installation.

Oval LED Quad Flash (Strobe)



PRXE-920A



PRXE-920CA



PRXE-920B



PRXE-920R

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRX-920A	Amber	24	Amber	Quad	9V - 36V	0.38 @ 12V	Retail Bag
PRXE-920CA	Amber	24	Clear	Quad	9V - 36V	0.38 @ 12V	Retail Bag
PRXE-920B	Blue	24	Blue	Quad	9V - 36V	0.38 @ 12V	Retail Bag
PRXE-920R	Red	24	Red	Quad	9V - 36V	0.38 @ 12V	Retail Bag

- Lamp Dimension : 6-1/2" L x 2-1/4" W x 1-3/4" H
- Polycarbonate Lens & Body
- EMC IP67
- **SAE J595 Class 2**



PRXE-920R-K



PRXE-920A-KM



PRXE-920CA-KM

Part No.	Kits for Instant Installation:	Pkg
PRXE-920A-K	with Open Back Grommet & Double Contact Pigtail	Retail Bag
PRXE-920CA-K	with Open Back Grommet & Double Contact Pigtail	Retail Bag
PRXE-920B-K	with Open Back Grommet & Double Contact Pigtail	Retail Bag
PRXE-920R-K	with Open Back Grommet & Double Contact Pigtail	Retail Bag
PRXE-920A-KM	with Black Steel Mounting Bracket, Open Back Grommet & Double Contact Pigtail	Retail Bag
PRXE-920CA-KM	with Black Steel Mounting Bracket, Open Back Grommet & Double Contact Pigtail	Retail Bag
PRXE-920B-KM	with Black Steel Mounting Bracket, Open Back Grommet & Double Contact Pigtail	Retail Bag
PRXE-920R-KM	with Black Steel Mounting Bracket, Open Back Grommet & Double Contact Pigtail	Retail Bag

Part No.	Accessories for PRXE-920 series	Pkg
PRXF-S950	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag

Oval LED Sequential Flashing (Arrows)



PRXE-921A



PRXE-921A-K



PRXE-921A-KM

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-921A	Amber	35	Amber	Sequential	9V - 36V	0.38 @ 12V	Retail Bag

- Lamp Dimension : 6-1/2" L x 2-1/4" W x 2" H
- Polycarbonate Lens & Body
- Sequential Flash Fills Lamp and Repeats
- EMC IP67

Part No.	Kits for Instant Installation:	Pkg
PRXE-921A-K	E-921A with Open Back Grommet & Double Contact Pigtail	Retail Bag
PRXE-921A-KM	E-921A with Black Steel Mounting Bracket, Open Back Grommet & Double Contact Pigtail	Retail Bag

Part No.	Accessories for E-921 series	Pkg
PRXF-S950	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag

Heavy Duty LED Quad Flash (Strobe)

Part No.	Colour	Diodes	Flash Pattern	Voltage	Amps	Pkg
PRXE-888AC	Amber	8 High Output Diodes	Quad	12V - 40V	1.30 @ 12V	Box

- Lamp Dimension : 7-1/2" H x 8-3/4" Base Dia
- Aluminium Base with Polycarbonate Amber Lens & Clear Dome
- Mounting Options : 3-1/2" center or 7" center
- IP65
- **SAE J845 Class 1**



PRXE-888AC

Part No.	Colour	Diodes	Flash Pattern	Voltage	Amps	Pkg
PRXE-880AC	Amber	120	Quad	12V	0.87	Box

- Lamp Dimension : 7-1/2" H x 8-3/4" Base Dia
- Aluminium Base with Polycarbonate Amber Lens & Clear Dome
- Mounting Options : 3-1/2" center or 7" center
- EMC IP65
- **SAE J845 Class 2**



PRXE-880AC

Part No.	Accessories for E-888AC & E-880AC	Pkg
PRXF-S950	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXF-F680	Mounting Plate & Bracket Set for mounting on pole or mirror arm	Bulk

Combination LED Quad Flash (Strobe) & LED Rotating

Part No.	Colour	Diodes	Flash Pattern	Voltage	Amps	Pkg
PRXE-658A	Amber	8 High Output Diodes	Quad / Rotating	12V - 50V	1.50 @ 12V	Box

- Lamp Dimension : 4-1/2" H x 6-1/2" Base Dia
- Aluminium Base & Polycarbonate Lens
- **Switch (PRXST109) Included** for Flash Pattern Selection
- 3 Mounting Holes on 6" diameter
- IP65
- **SAE J845 Class 1** on Quad Flash
- **SAE J845 Class 2** on Rotating Flash



PRX-658A

Part No.	Accessories for E-658A	Pkg
PRXE-S950	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXE-F680	Mounting Plate & Bracket Set for mounting on pole or mirror arm	Bulk
PRXE-FM600	Magnet Mount Kit w/ Coiled Wire and Fused Cigarette Power Adaptor to convert lamp to magnetic mount	Bulk

LED Rotating Flash



PRXE-650 A

Part No.	Colour	Diodes	Flash Pattern	Voltage	Amps	Pkg
PRXE-650A	Amber	8 High Output Diodes	Rotating	12V - 40V	0.60 @ 12V	Box

- Lamp Dimension : 5" H x 6-1/2" Base Dia
- Sturdy ABS Base & Polycarbonate Lens
- 3 Mounting Holes on 6" diameter
- IP65
- **SAE J845 Class 2**

Part No.	Accessories for E-650A	Pkg
PRXF-S950	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXF-F680	Mounting Plate & Bracket Set for mounting on pole or mirror arm	Bulk
PRXF-FM600	Magnet Mount Kit w/ Coiled Wire and Fused Cigarette Power Adaptor to convert lamp to magnetic mount	Bulk

LED Quad Flash (Strobe)



PRXE-550A

Part No.	Colour	Diodes	Flash Pattern	Voltage	Amps	Pkg
PRXE-550A	Amber	120	Quad	12V	0.87	Box

- Lamp Dimension : 5" H x 6.3" Base Dia
- Sturdy ABS Base & Polycarbonate Lens
- 3 Mounting Holes on 6" diameter
- EMC IP65
- **SAE J845 Class 2**



PRXE-550AT Pole Mount

PRXE-550AT Surface Mount

Part No.	Colour	Diodes	Flash Pattern	Voltage	Amps	Pkg
PRXE-550AT	Amber	120	Quad	12V	0.87	Box

- Lamp Dimension : 5" H x 6.3" Base Dia
- Black Enamel Aluminium Base with Chrome Ring
- Pole Mount use 1" pipe thread NPT (pipe not included)
- 3 Mounting Holes on 6" diameter
- EMC IP65
- **SAE J845 Class 2**



PRXE-553A

Part No.	Colour	Diodes	Flash Pattern	Voltage	Amps	Pkg
PRXE-553A	Amber	8 High Output Diodes	Quad	12V	0.96 @ 12V	Box

- Lamp Dimension : 5" H x 6.5" Base Dia
- Sturdy ABS Base & Polycarbonate Lens
- 3 Mounting Holes on 6" diameter
- IP66
- **SAE J845 Class 2**

Part No.	Accessories for E-550A, E-550AT & E-553A	Pkg
PRXF-S950	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXF-F680	Mounting Plate & Bracket Set for mounting on pole or mirror arm	Bulk
PRXF-FM600	Magnet Mount Kit w/ Coiled Wire and Fused Cigarette Power Adaptor to convert lamp to magnetic mount	Bulk

LED Quad Flash (Strobe)

Permanent Mount Model

Part No.	Colour	Diodes	Flash Pattern	Voltage	Amps	Pkg
PRXE-330A	Amber	30	Quad	12V - 40V	0.14 @ 12V	Box
PRXE-330W	White	30	Quad	12V - 40V	0.14 @ 12V	Box

- Lamp Dimension : 3-3/4" H x 5" Base Dia
- Sturdy ABS Base & Polycarbonate Lens
- 3 Mounting Holes on 4-3/4" diameter
- IP66

Part No.	Accessories for E-330A	Pkg
PRXF-S950	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXF-F680	Mounting Plate & Bracket Set for mounting on pole or mirror arm	Bulk



Magnetic Mount Models

Part No.	Colour	On/Off Switch	Diodes	Flash Pattern	Voltage	Amps	Pkg
PRXE-330AM	Amber	No	30	Quad	12V - 40V	0.14 @ 12V	Box
PRXE-332AM	Amber	Yes	30	Quad	12V - 24V	0.14 @ 12V	Box
PRXE-330BM	Blue	No	30	Quad	12V - 40V	0.14 @ 12V	Box

- Lamp Dimension : 3-3/4" H x 5" Base Dia
- Magnetic Base with Fused Cigarette Power Adaptor & Polycarbonate Lens
- IP66



LED Rotating Flash

Part No.	Colour	Diodes	Flash Pattern	Voltage	Amps	Pkg
PRXE-350A	Amber	30	Rotating	12V	0.10	Box

- Lamp Dimension : 4" H x 5" Base Dia
- Sturdy ABS Base & Polycarbonate Lens
- 3 Mounting Holes on 4-5/8" diameter
- IP66

Part No.	Accessories for E-350A	Pkg
PRXF-S950	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXF-F680	Mounting Plate & Bracket Set for mounting on pole or mirror arm	Bulk
PRXF-FM600	Magnet Mount Kit w/ Coiled Wire and Fused Cigarette Power Adaptor to convert lamp to magnetic mount	Bulk



Battery Operated LED Rotating

Part No.	Colour	Diodes	Flash Pattern	Mounting	Pkg
PRXE-480AM	Amber	20	Rotating	Magnetic Base	Box
PRXE-480BM	Blue	20	Rotating	Magnetic Base	Box
PRXE-480AB	Amber	20	Rotating	Bracket Mount	Box

- Lamp Dimension : 4-1/2" H x 5" Base Dia
- Comes with On/Off Switch
- Use 4 AA Batteries (not included)
- IP65



Battery Operated LED (Strobe)



PRXE-420AM

Part No.	Colour	Diodes	Flash Pattern	Mounting	Pkg
PRXE-420AM	Amber	4	Single	Magnetic Base	Box

- Lamp Dimension : 4" H x 4-3/4" Base Dia
- Comes with On/Off Switch
- Use 2 AA Batteries (not included)
- IP65



PRXE-450AM

Part No.	Colour	Diodes	Flash Pattern	Mounting	Pkg
PRXE-450AM	Amber	30	Quad	Magnetic Base	Box

- Lamp Dimension : 5" H x 4-3/4" Base Dia
- Comes with On/Off Switch
- Use 9V Battery (not included)

Multiple Pattern LED Mini Dual Warning Light Sets

Each set contains 2 LED synchronized strobe heads. Strobe heads can be mounted inside head or tail lamp assemblies or surface mounted. All necessary mounting hardware included.



PRXE-985AK
LED Strobe Heads

Part No.	Diodes Colour	Diodes	Lens Colour	Flash Pattern	Voltage	Amps	Pkg
PRXE-985AK	Amber	6	Amber	19 Patterns	12V	0.7	Box
PRXE-985CAK	Amber	6	Clear	19 Patterns	12V	0.7	Box
PRXE-985CWK	White	6	Clear	19 Patterns	12V	0.7	Box
PRXE-985BK	Blue	6	Blue	19 Patterns	12V	0.7	Box



Control Box



Extension Wire



Gaskets & Screws




Black Flanges




Taggle Switch

- Each Light Set consists of:
 - 2 LED Strobe Heads in Chrome Aluminium Base & Polycarbonate Lens
 - 2 Black Flanges
 - Control Box with 36" Wire Harness at Each End
 - 80" Extension Wire Harness
 - Momentary On-Off Chrome Toggle (PRXST108) for Flash Pattern Selection - Gaskets & Screws
- Lamp Dimension : 1-1/2" Dia x 1-1/16" H
- Mounting Holes : 2 holes @ 1-9/32 centers
- IPX7

Part No.	Accessories for E-958 series	Pkg
PRXF-S950	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXE-F985-5	Chrome Flange	Retail Bag



Headlamp/Tail lamp
Assembly Mount



Surface Mount

Heavy Duty Strobe

Part No.	Colour	Flash Pattern	Joules	Voltage	Amps	Pkg
PRXC-883AC	Amber	Double/Quad SAE J845 Class 2	17	12V - 24V	2.21 @ 12V	Box
PRXC-880BC	Blue	Single/Quad Quad - SAE J1318 Class 2 Single - SAE J1318 Class 3	14	12V - 48V	2.0 @ 12V	Box

- Lamp Dimension : 7-1/2" H x 8-3/4" Base Dia
- Aluminium Base with Polycarbonate Lens & Clear Dome
- Mounting Options : 3-1/2" center or 7" center
- EMC IP65



PRXC-883AC

Part No.	Accessories for C-883AC & C-880BC	Pkg
PRXF-S950	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXF-F680	Mounting Plate & Bracket Set for mounting on pole or mirror arm	Bulk
PRXCB-883	Replacement Flash Bulb for PRXC-883AC	Clamshell
PRXCB-880	Replacement Flash Bulb for PRXC-880BC	Clamshell
PRXCC-880	Replacement Clear Dome	Bulk
PRXCL-550A	Replacement Amber Lens for	Bulk
PRXCL-550B	Replacement Blue Lens for	Bulk



PRXC-880BC

Part No.	Colour	Flash Pattern	Joules	Voltage	Amps	Pkg
PRXC-553A	Amber	Double/Quad SAE J845 Class 2 w/ High/Low Intensity Option	17	12V - 24V	2.21 @ 12V	Box

- Lamp Dimension : 4-3/4" H x 6-7/16" Base Dia
- Aluminium Base & Polycarbonate Lens
- Mounting:
Surface Mount - 3 Mounting Holes (3/16") on 6" centres
Pole Mount use 1" pipe thread NPT (pipe not included)
- EMC IP66



PRXC-553A

Part No.	Colour	Flash Pattern	Joules	Voltage	Amps	Pkg
PRXC-550A	Amber	Double/Quad Double - SAE J1318 Class 2 Quad - SAE J1318 Class 3	12	12V - 48V	2.0 @ 12V	Box
PRXC-550B	Blue	Double/Quad	12	12V - 48V	2.0 @ 12V	Box

- Lamp Dimension : 5" H x 6-1/2" Base Dia
- Sturdy ABS Base & Polycarbonate Lens
- 3 Mounting Holes on 6" diameter
- EMC IP66



PRXC-553A Base Surface or Pole Mount



PRXC-550A

Part No.	Accessories for C-553A, C-550A & C-550B	Pkg
PRXF-S950	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXF-F680	Mounting Plate & Bracket Set for mounting on mirror arm	Bulk
PRXF-FM600	Magnet Mount Kit w/ Coiled Wire and Fused Cigarette Power Adaptor to convert lamp to magnetic mount	Bulk
PRXCB-553	Replacement Flash Bulb for PRXC-553A	Clamshell
PRXCB-550	Replacement Flash Bulb for PRXC-550A & PRXC-550B	Clamshell
PRXCL-553A	Replacement Amber Lens for PRXC-553A	Bulk
PRXCL-550A	Replacement Amber Lens for PRXC-550A	Bulk
PRXCL-550B	Replacement Blue Lens for PRXC-550B	Bulk



PRXC-550B



PRXC-450AD

Part No.	Colour	Flash Pattern	Joules	Voltage	Amps	Pkg
PRXC-450AD	Amber	Single	3	12V - 48V	0.3 @ 12V	Box
PRXC-450BD	Blue	Single	3	12V - 48V	0.3 @ 12V	Box

- Lamp Dimension : 4-1/2" H x 5-1/2" Base Dia
- Rubber Base & Polycarbonate Lens
- 2 Mounting Studs (#8 screws) on 4" center
- IP65



PRXC-450BD

Part No.	Accessories for C-450AD & C-450BD	Pkg
PRXF-S950	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXCB-450	Replacement Flash Bulb for PRXC-450AD & PRXC-450BD	Clamshell
PRXCL-550A	Replacement Amber Lens for PRXC-450AD	Bulk
PRXCL-550B	Replacement Blue Lens for PRXC-450BD	Bulk

PRXC-330B



PRXC-330A

Permanent Mount Models

Part No.	Colour	Flash Pattern	Joules	Voltage	Amps	Pkg
PRXC-330A	Amber	Single	2	12V - 120V	0.25 @ 12V	Box
PRXC-330B	Blue	Single	2	12V - 120V	0.25 @ 12V	Box

- Lamp Dimension : 4" H x 5" Base Dia
- Sturdy ABS Base & Polycarbonate Lens
- 3 Mounting Holes on 4-3/4" diameter
- EMC IP66

Part No.	Accessories for C-330A & C-330B	Pkg
PRXF-S950	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXF-F680	Mounting Plate & Bracket Set for mounting on pole or mirror arm	Bulk
PRXCB-330	Replacement Flash Bulb for PRXC-330A & PRXC-330B	Clamshell
PRXCL-330A	Replacement Amber Lens for PRXC-330A	Bulk
PRXCL-330B	Replacement Blue Lens for PRXC-330B	Bulk



PRXC-330AM



PRXC-330BM

Magnetic Mount Models

Part No.	Colour	Flash Pattern	Joules	Voltage	Amps	Pkg
PRXC-330AM	Amber	Single	2	12V - 120V	0.25 @ 12V	Box
PRXC-330BM	Blue	Single	2	12V - 120V	0.25 @ 12V	Box

- Lamp Dimension : 4" H x 5" Base Dia
- Magnetic Base with Power Adaptor Polycarbonate Lens
- EMC IP66

Part No.	Accessories for C-330AM & C-330BM	Pkg
PRXCB-330	Replacement Flash Bulb for PRXC-330AM & PRXC-330BM	Clamshell
PRXCL-330A	Replacement Amber Lens for PRXC-330AM	Bulk
PRXCL-330B	Replacement Blue Lens for PRXC-330BM	Bulk

Towmotor Application Strobe

Part No.	Colour	Flash Pattern	Joules	Voltage	Amps	Pkg
PRXC-250A	Amber	Single	2	12V - 120V	0.24 @ 12V	Box

- Lamp Dimension : 5" H x 2-3/4" Base Dia
- Mounting : 3-3/8" centre
- Mounting Hole : 3/16"
- ABS Base & Polycarbonate Lens
- EMC IP66

Part No.	Accessories for C-250A	Pkg
PRXF-S950	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXCB-250	Replacement Flash Bulb for PRXC-250A	Clamshell
PRXCL-250A	Replacement Amber Lens for PRXC-250A	Bulk



PRXC-250A


Dual Strobe Light Bar

Dual Quad Flash Strobe Light Bar in alternating sequence. Centre mirrored reflector doubles the effect of the strobe. Small compact design suitable for fitting in a variety of locations.

Part No.	Colour	Flash Pattern	Voltage	Amps	Pkg
PRXC-100A	Amber	Alternating Quad Flash SAE J845 Class 2	12V	1.80	Box

- Lamp Dimension : 16" L x 8-1/2" W x 6" H
- Sturdy ABS Base with Polycarbonate Dome & Lens
- Mounting : 4 mounting screws @ 12-3/4" and 5-1/4" centres

Part No.	Accessories for C-100A	Pkg
PRXF-S950	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag



PRXC-100A

Rotating Beacon Lights

Single Rotating Beacon

Part No.	Colour	Flash Pattern	Voltage	Amps	Bulb	Pkg
PRXC-R880A	Amber	Single Rotating @ 150 fpm SAE J845 Class 1	12V	5	H1	Box
PRXC-R880B	Blue	Single Rotating @ 150 fpm	12V	5	H1	Box

- Lamp Dimension : 7-3/4" H x 8-3/4" Dia
- Aluminium Base with Polycarbonate Lens
- Mounting : 3-1/2" or 7-1/16" centres
- EMC IP65

Part No.	Accessories for PRXC-R880A & PRXC-R880B	Pkg
PRXF-S970	Fuse/Switch Kit consisting of: PRXST100 On/Off Toggle Switch, PRXATM075 7.5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXF-F680	Mounting Plate & Bracket Set for mounting on pole or mirror arm	Bulk
PRXCL-R880A	Replacement Amber Lens for PRXC-R880A	Bulk
PRXCL-R880B	Replacement Blue Lens for PRXC-R880B	Bulk



PRXC-R880A



PRXC-R880B

Mounting Plate & Bracket Set - for Pole Mount or Mirror Arm Mount



PRXE-F680
Pole Mount



PRXE-F680
Mirror Arm Mount

Part No.	Description	Pkg
PRXE-F680	Mounting Plate & Bracket Set consisting of: 6-1/2" Round Plated Steel Base Mount and Brushed Aluminium Mirror Mounting Bracket with 1/2" centred mounting hole	Bulk

For Use with:

PRXC-330A	PRXC-880BC	PRXE-330A	PRXE-650A
PRXC-330B	PRXC-883AC	PRXE-350A	PRXE-658A
PRXC-550A	PRXC-R880A	PRXE-550A	PRXE-880AC
PRXC-550B	PRXC-R880B	PRXE-553A	PRXE-888AC
PRXC-553A			

Magnet Mount Kit - to convert Lamp to Magnetic Mount



PRXE-FM600

Part No.	Description	Pkg
PRXE-FM600	Magnetic Mount Kit consisting of: 6-1/2" Round Plated Steel Base with Magnet and Rubber Housing Coiled Wire & Cigarette Power Adaptor	Bulk

For Use with:

PRXC-550A	PRXE-350A	PRXE-650A
PRXC-550B	PRXE-550A	PRXE-658A
PRXC-553A	PRXE-553A	

Fuse/Switch Kits



PRXST-100



PRXF-S950

Part No.	Fuse/Switch Kit consisting of:	Pkg
PRXF-S935	PRXST100 On/Off Toggle Switch PRXST108 Momentary On-Off Toggle Switch PRXATS03 3 Amps Standard Fuse PRXATSF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXF-S950	PRXST100 On/Off Toggle Switch PRXATM05 5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXF-S955	PRXST100 On/Off Toggle Switch PRXST105 On-Off-Momentary On Toggle Switch PRXATM05 5 Amps Mini Fuse PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXF-S970	PRXST100 On/Off Toggle Switch PRXATM075 7.5 Amps Mini Fuse & PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag
PRXF-S975	PRXST100 On/Off Toggle Switch PRXST105 On-Off-Momentary On Toggle Switch PRXATM075 7.5 Amps Mini Fuse PRXATMF14C In-Line Fuse Holder w/ Cover	Retail Bag

SAE Class 1, Class 2 or Class 3? Not sure what to use on your application?

Per SAE specifications:

Class 1 Optical Warning Device is a primary optical warning device for use on authorized emergency vehicles responding to emergency situations. These devices are utilized to capture the attention of motorists and pedestrians and warn of a potentially hazardous activity or situation. Examples of emergency vehicles are police vehicles, fire trucks and ambulances.

Class 2 Optical Warning Device is a primary optical warning device for use on authorized maintenance or service vehicles to warn of traffic hazards such as a lane blockage or slow moving vehicle. Examples of maintenance or service vehicles are tow trucks, snow plow vehicles, Department of Highway road maintenance vehicles and other slow moving vehicles.

Class 3 Optical Warning Device is a primary optical warning device for use on vehicles authorized to display an optical warning device for identification only.



DETECT · ALERT · REACT with PROVIX!

PROVIX is a leading supplier of Proximity Detection and Collision Avoidance systems that increase safety, prevent accidents and increase productivity.

PROVIX Proximity detection systems and Equipment Blind Spot Cameras serve to enhance safety by increasing operators' situational awareness of surrounding vehicles and personnel.

PROVIX supplies Backsense object detection that utilises Radar technology to alert vehicle and equipment operators of the presence of any object within the desired detection zone of a vehicle.

PROVIX supplies Self-adjusting, broadband/ white noise reversing alarms that are safer for workers. These intelligent back up alarms reduce noise complaints and eliminate worker acclimatization associated with conventional tonal alarms as they are only heard within the danger area of the reversing vehicle.

PROVIX Safety systems keep workers safe and reduce equipment damage costs.

Contact your PROVIX tech rep to discuss how to best protect your personnel and equipment.

Provix Radar Detection System


PROVIX.NET
Now I CAN SEE!



Features:

- Close detection zone combined with targeted beam pattern
- Controlled beam pattern to minimise false warnings
- Excellent close-in detection
- Frequency modulated continuous wave radar technology
- Can trigger other vehicle safety devices such as camera monitor systems or reversing alarms
- Eliminates possibility of driver interference. The audible warning buzzer cannot be switched off, providing fleet operators with peace of mind
- Clear, easy-to-read display and wide volume range of audible alert
- Suitable for both on- and off-road applications
- Extremely rugged design for severe weather conditions and all terrains
- Effective through non-metallic objects - can fit behind plastic or glass fibre body work
- Self-diagnostics alert operator to system errors
- Choice of detection ranges
- 5 stage audible and visual display
- Comprehensive certification

Every System has an in-cab audio alert and LED display to alert the operator to hazards and their proximity.

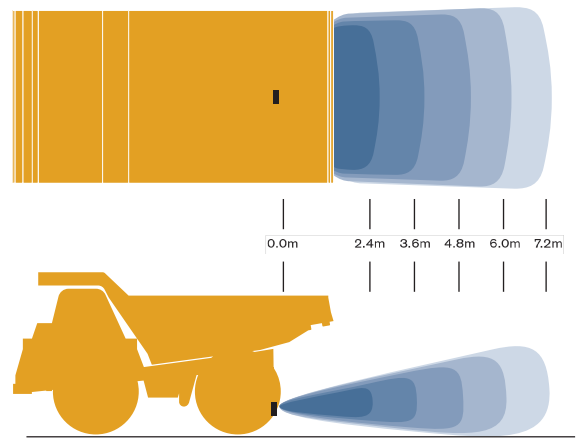



Eliminate Noise Complaints NOW!

Increase Worker Safety

Keep Your Neighbors Happy!



BROADBAND WHITE SOUND BACK-UP ALARMS

**INTRODUCING THE SMART, SELF-ADJUSTING BBS-TEK® BACK-UP ALARMS
WITH VOLUME RANGES FROM 77-97DB AND 87-107DB**



MAKING THEM IDEAL FOR TRUCKS, BUSES, COACHES, FORKLIFTS, AIRPORT VEHICLES,



77-97db

CONSTRUCTION & MINING MACHINERY, AS WELL AS WORKING IN AREAS WHERE THE AMBIENT NOISE LEVEL MAY VARY SIGNIFICANTLY.



87-107db *

**PROVIDES GREATER SAFETY & LESS NOISE
NUISANCE THAN ANY OTHER ALARM!**

This is particularly important for vehicles

maneuvering in close proximity to each

other or going from a noisy environment, such as a factory floor, to a quieter external

location, such as a work yard, ensuring the warning is always heard.



KEY BENEFITS:

- 'Smart' self-adjusting sound level
- Ambient noise is monitored once every second
- Automatically adjusts the alarm volume 5-10dB above the sampled noise level
- Sound is instantly locatable so you can tell which vehicle is reversing
- Focuses warning sound in the danger zone behind the vehicle, so it doesn't annoy site neighbors or other people
- Unlike conventional alarms, the 'shh... shh...' sound of broadband sound (white sound) is easy on the ear and dissipates fast outside the danger area
- Tough, Durable, Waterproof (IP68)
- Conforms to SAE J994 environmental standards
- Solid state, spark-free electronics
- Epoxy sealed for protection against vibration, dust and moisture

<u>SPECIFICATION:</u>	<u>97:</u>	<u>107:</u>
POWER INPUT	12-24Vdc	12-24Vdc
POWER CONSUMPTION	0.5	1.0
SOUND LEVEL (DB(A)@1M)	77-97	87-107
SOUNDER UNIT	Speaker	Speaker
FREQUENCY	Multi	Multi
DIMENSIONS (IN.)	5 x 2.5 x 3.6	7 x 3.7 x 3.1

CALL TOLL FREE: 1-888-434-0253 — CONTACT: SALES@PROVIX.NET — VISIT: WWW.PROVIX.NET

Provix Broadband Alarms– The Benefits

SAFETY – Much Greater Safety

- **Their sound is locatable**
The location of a broadband sound source is instantly and unambiguously recognisable and reveals immediately which vehicle or machine is backing-up. Narrowband sound is liable to give false directional clues due to reflection off surfaces such as buildings, quarry faces etc. sometimes with fatal results
- **Sound is localised within hazard area**
Familiarity with unneeded warning alarms heard *outside* the hazard area breeds general contempt for them – very dangerous when real need is.
- **Audible through Ear Defenders**
The lower frequencies of their broad frequency spectrum penetrate ear defenders more readily than the higher frequencies of narrowband alarms
- **End to intentional disconnects**
Operators and site workers, driven mad by old narrowband alarms, are very happy to work with broadband and appreciate its safety value

ENVIRONMENT – End To Noise Complaints

- **Rapid Sound Dissipation**
Broadband sound dissipates much faster than narrowband. This results in its warning sound being confined to the hazard area.
- **Less Irritating**
Psychoacoustically, broadband sound is tolerable whereas pulsed narrowband sound disturbs and irritate workers and householders far from the hazard area.
- **Less decibels**
Broadband sound is *equally audible at lower Sound Pressure Levels* than narrowband.

HEALTH – Reduce Hearing Damage & “Startle”

- **Reduced risk of Hearing Damage**
Lower sound-pressure levels spread across a broad frequency-band diminish the hearing-damage hazard of high narrowband frequencies (the stiletto heel effect)
- **Heart risk due to “startle”**
Sudden burst of loud narrowband sound nearby can cause severe heart stress due to the “startle” factor

NOISE - The 21ST Century Pollutant

”Calling noise a nuisance is like calling smog an inconvenience”,

Dr William H. Stewart, former Surgeon General of USA

“Noise is any loud, discordant or disagreeable sound or sounds”

Webster’s New Woropld Dictionary

Broadband back-up alarms are “noiseless” – their sound is neither loud, discordant nor disagreeable. Traditional, old narrowband alarms are intrinsically unsafe, noisy, irritating, disagreeable, injurious to health, cause stress and are frequently sabotaged. They are now obsolete.

PROVIX FLEET MANAGEMENT GPS

VEHICLE TRACKING SOLUTIONS MADE SIMPLE, RELIABLE, AND AFFORDABLE



HARDWIRED UNIT

- HARDWIRED – CANNOT BE EASILY REMOVED BY VEHICLE OPERATOR
- NOTIFICATION THAT POWER IS LOST IF UNPLUGGED BY OPERATOR
- INTERNAL 200 MAH BACKUP BATTERY
- ACCURATE LOCATION WITHIN 2 METERS

USER FRIENDLY WEB BASED PROGRAM

PROVIX.NET Now I CAN SEE! Welcome, John Stead Log Out

Overview History Notifications Settings FAQ Support

All Readings Idles Stops Trips Speed Alerts Zone Alerts Device Battery Alerts Email Report

For: Provix1 From: 2015-11-05 00:00 To: 2015-11-16 23:59 Go

Location	Speed	Event Type	When (EST)
455 Government Rd W, Cha...	0	Engine On	15 Nov 2015 07:13:57 PM
455 Government Rd W, Cha...	0	Engine Off	15 Nov 2015 07:10:48 PM
ON-66, Chaput Hughes ON	89		15 Nov 2015 07:08:51 PM
ON-112, Kirkland Lake ON	84		15 Nov 2015 07:06:51 PM
71 ON-112, Chaput Hughes ...	100		15 Nov 2015 07:04:51 PM
71 ON-112, Chaput Hughes ...	97		15 Nov 2015 07:02:51 PM
ON-112, ON	100		15 Nov 2015 07:00:51 PM
ON-112, ON	101		15 Nov 2015 06:58:51 PM
ON-112, Tarzwell ON	98		15 Nov 2015 06:56:51 PM
6120 ON-11, ON	58		15 Nov 2015 06:54:51 PM
ON-11, Tarzwell ON	104		15 Nov 2015 06:52:51 PM
336352 ON-11, Englehart ON	106		15 Nov 2015 06:50:51 PM
ON-11, Englehart ON	108		15 Nov 2015 06:48:51 PM
ON-11, Englehart ON	107		15 Nov 2015 06:46:51 PM
ON-11, Englehart ON	108		15 Nov 2015 06:44:51 PM
334416 ON-11, Englehart ON	85		15 Nov 2015 06:42:51 PM
330 Trans-Canada Hwy, En...	110		15 Nov 2015 06:40:52 PM
330 Trans-Canada Hwy, En...	108		15 Nov 2015 06:38:52 PM
ON-11, Earlton ON	106		15 Nov 2015 06:36:52 PM
Trans-Canada Hwy, Earlton...	107		15 Nov 2015 06:34:52 PM
ON-11, Thomloe ON	107		15 Nov 2015 06:32:52 PM

Previous 1 2 3 ... 33 Next

OBD PLUG-IN UNIT

- NOTIFICATION THAT POWER IS LOST IF UNPLUGGED BY OPERATOR
- OBD PLUG IN THAT CAN BE REMOVED BY OPERATOR
- INTERNAL 200 MAH BACKUP BATTERY
- ACCURATE LOCATION WITHIN 2 METERS



PROVIX.NET
Now I CAN SEE!

CALL TOLL FREE: 1-888-434-0253

CONTACT: SALES@PROVIX.NET

VISIT: WWW.PROVIX.NET

ISO 9001: 2008 Certified